


Shadow EW™ 500

Small form factor software-defined radio for dynamic platform needs

Building upon decades of industry-leading experience from across the electronic warfare (EW) spectrum, the Shadow EW family of products is positioned to provide large platform capability in a small footprint. The Shadow EW 500 series is a hybrid software-defined radio (SDR), optimized for radar EW operations while supporting signals intelligence (SIGINT) and communications intelligence (COMINT) through its streaming in-phase and quadrature (IQ) interface.

The series is built for small form factor applications with challenging SWaP-C requirements, positioned for the affordable-mass and unmanned aerial vehicle (UAV) markets. The system provides precision radio frequency (RF) direction finding (DF) and geolocation with wideband situational awareness from two wideband receiver channels. Each receiver supports 4 GHz of instantaneous receive bandwidth. High-performance edge processing is supported by an Orin AGXi system-on-module and an UltraScale+ ZU47.

Shadow EW SDRs come with comprehensive software and hardware interface control documents (ICDs) to streamline platform integrations. We design and build our SDRs with the latest industry standard gigabit Ethernet protocols. This gives operators the flexibility to plug them into nearly any system architecture. With a single, unified solution, it cuts down on development time and reduces integration risk. It also ensures that platforms are ready for the threats of tomorrow.

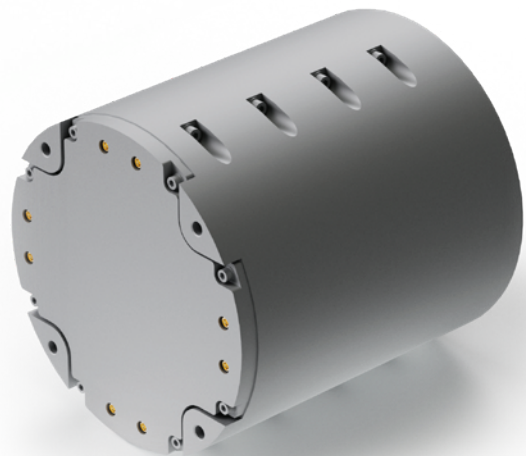

Features and benefits

- 10 MHz –18 GHz RF coverage supports a wide range of EW mission needs
- Low SWaP-C design fits small form factor, affordable-mass, and UAV payload applications
- Dual 4 GHz-instantaneous bandwidth (IBW) receivers (2 Rx) enable wideband DF and geolocation operations
- Wideband 2 GHz IBW transmitter supports high fidelity EW transmissions
- 10W effective isotropic radiative power output provides effective transmit performance for tactical missions
- Gigabit Ethernet interface simplifies integration with standard system architectures
- UltraScale+ RFSoc and Orin AGXi processing delivers on-board edge computing capability
- BIG IRON framework compatibility supports enterprise-level EW integration

Compact. Configurable. Combat-ready. Shadow EW.

Specifications

Model #	Shadow EW 500 ¹
Weight	7 lbs.
Dimensions	5" diameter x 5.51"
Watts	< 250 watts max (with internal PA)
Frequency coverage	10 MHz - 18 GHz
System receive IBW	8 GHz 2 Rx (4 GHz IBW per channel)
System transmit IBW	2 GHz
RF inputs/outputs	8
Production start	2029

¹ Precision single-platform DF and geolocation capable

For more information contact:
BAE Systems

Nick Myers
P.O. Box 868
Nashua, NH 03061
T: 603 885 5455
E: nick.myers@baesystems.us
W: www.baesystems.com/ew

Approved for public release on 7/26; distribution is unlimited.
Not export controlled per ES-ECS-070626-0106.

BAE Systems | Shadow EW™ 500

Disclaimer and copyright
This document gives only a general description of the product(s) and service(s) and, except where expressly provided otherwise, shall not form any part of any contract. From time to time, changes may be made in the products or the conditions of supply.

BAE SYSTEMS is a registered trademark of BAE Systems plc.
©2026 BAE Systems. All rights reserved.
CS-26-A04-02