
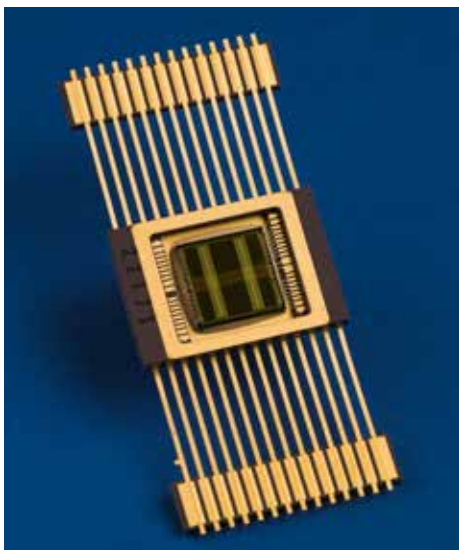


Programmable read-only memory 32K x 8 radiation-hardened PROM — 5V

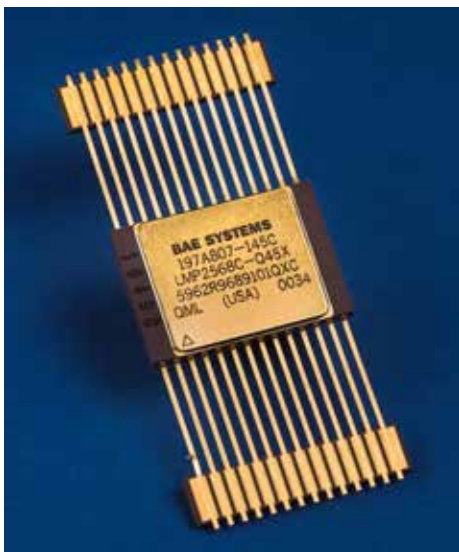

The PROM is fabricated with BAE Systems' QML-qualified radiation-hardened technology and is designed for use in systems operating in radiation environments.

Description

The radiation hardened oxide-nitride-oxide antifuse technology features, 5V transistors in the data path, and high-voltage N and PFETs in the programming path circuitry. The PROM operates over the full military temperature range, requires a single 5V \pm 5 percent power supply, and is available with either TTL- or CMOS-compatible I/O. Power consumption is typically 15 mW/MHz in operation and is less than 10 mW/MHz in the low power-enabled mode. The PROM operation is fully asynchronous, with an associated typical access time of less than 27 nanoseconds. Synchronous operation is also possible using CE as a clock.

Key features

- Read/write cycle times \leq 45 ns
- Operation from -55 degrees Celsius to 125 degrees Celsius
- SMD number: 5962R96891
- BAE Systems part number: 197A807
- Asynchronous operation
- CMOS- or TTL-compatible I/O
- Single 5V \pm 5 percent power supply
- Low operating power
- 28-lead flat pack (0.500 inches x 0.720 inches)
- Radiation levels
 - Fabricated with BAE Systems bulk
- CMOS technology
 - Total-dose hardness through 2×10^5 rad(Si)
 - Neutron hardness through 1×10^{12} N/cm²
 - SEU-immune (no latches)
 - Latchup-free


System definitions

A:0-14 Address input pins that select a particular eight-bit word within the memory array.

DQ:0-7 Bi-directional data pins that serve as data outputs during a read operation and as data inputs during a write operation.

OE Negative output enable, when at a high level, holds the data output drivers in a high impedance state. In programming mode, with OE high and CE low, data driver state is in "Data-In" to enable programming.

CE Chip enable, when at a low level with OE at low level, allows normal operation. When at a high level, CE forces the data output drivers in a high impedance state.

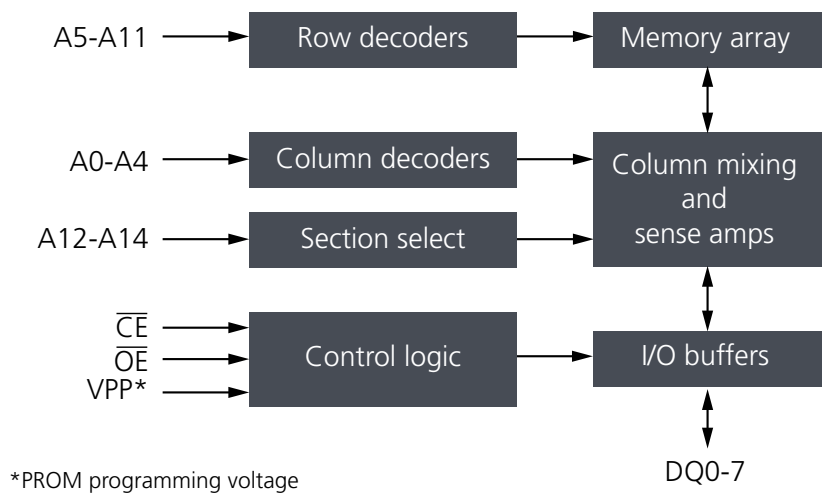

For more information contact:

BAE Systems

9300 Wellington Road
Manassas, Virginia 20110-4122

T: 571 364 7777

W: baesystems.com/rad750

Cleared for open publication by DoD,08/06

Disclaimer and copyright

BAE Systems reserves the right to restrict component sales based on application and volume. Please contact the factory for more information.

This document gives only a general description of the product(s) and service(s) and, except where expressly provided otherwise, shall not form any part of any contract. From time to time, changes may be made in the products or the conditions of supply.

BAE SYSTEMS is a registered trademark of BAE Systems plc.
©2025 BAE Systems. All rights reserved.
CS-16-H75